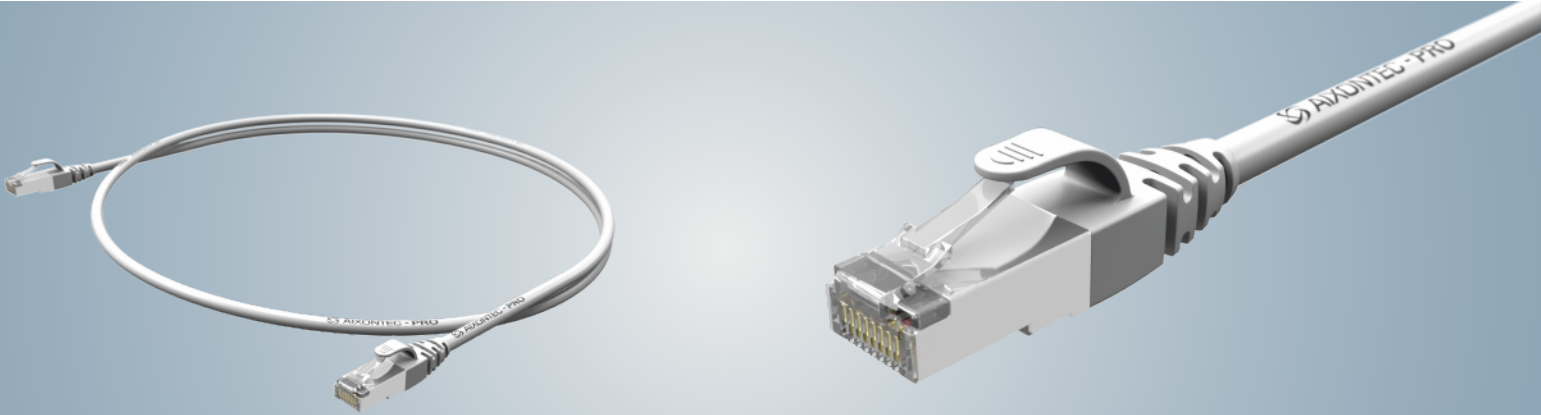# PRO300S Patch Cord

Cat.6 U/UTP AWG24/7 LSOH

PRODUCT DESCRIPTION

AIXONTEC® PRO300S unshielded Cat.6A RJ45 Patch cord with slim boot and latch protection. The slim and flexible boot provides an easy handeling for High- Density cabling. The AIXONTEC® PRO 300S Patch cords are most suitable for Voice, Video and Data-Applications of class E/ 250MHz up to 1 Gigabit Ethernet. Available in grey, for efficient port assignment we recommend our color coding rings.

TECHNICAL INFORMATION

Electrical values	Cat.6 (ISO/IEC) class E
Norms	ISO/IEC 11801 / EN 50173 / flame retardant / IEC 60332-
Halogen free	IEC 60754-1/2
Cable construction	Cat.6 4x2xAWG24/7 U/UTP
Plug	RJ45 Cat.6 unshielded, gold plated contacts
Pin assignment	1:1,Crossover on request
Cable diameter	5,6 mm
Outer shealth	LSOH/FRNC in grey, halogen free, smoke density and flame retardant
Boot	AIXONTEC® Slim boot (schlim & flexible) with latch protection in grey

ORDERING INFORMATION

Type number	20114
Item description	PRO300S Cat.6 U/UTP AWG24 LSOH
	Other lengths, colors, and colored boots on request.

ACCESSOIRES (OPTIONALLY)

21201	Color coding rings (VPE: 100 pcs., 10 of each color)

Length (m)	Grey
0,5	20114.GR0,5
1,0	20114.GR1,0
1,5	20114.GR1,5
2,0	20114.GR2,0
3,0	20114.GR3,0
4,0	20114.GR4,0
5,0	20114.GR5,0
8,0	20114.GR8,0
10,0	20114.GR10,0
12,0	20114.GR12,0
15,0	20114.GR15,0
20,0	20114.GR20,0
25,0	20114.GR25,0
30,0	20114.GR30,0
35,0	20114.GR35,0
50,0	20114.GR50,0